


## ESQUEMA DE CONEXIÓN

### INSTALACIÓN TÍPICA

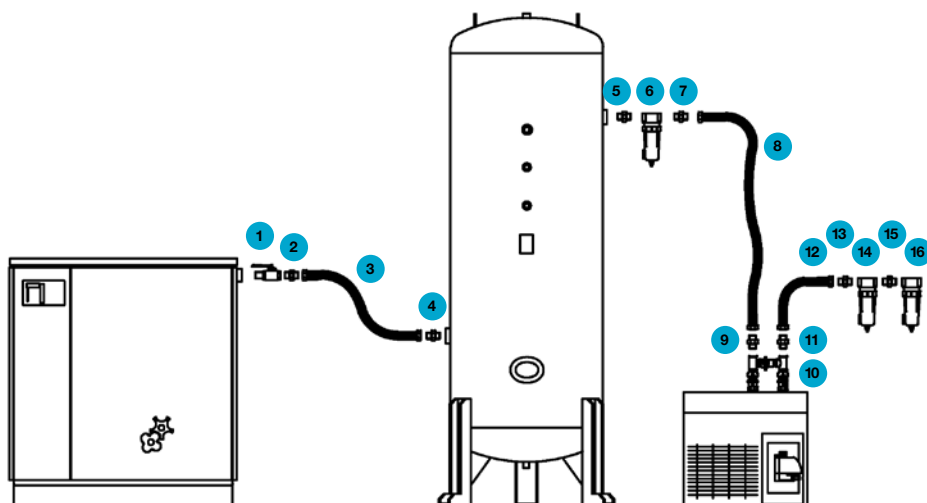

1	Grifo	A
2	Racor	R1
3	Manguera	M
4	Racor	R1
5	Racor	R2
6	Filtro	P/G
7	Racor	R1
8	Manguera	M
9	Racor	R1
10	By-pass	B
11	Racor	R1
12	Manguera	M
13	Racor	R1
14	Filtro	C/S
15	Racor	R3
16	Filtro	V

Conexiones	Tornillo	Pistón	Depósitos	Secadores	Filtros
1/4" (3/8")*		≤200 litros			(7)*
1/2"	PKL PKE (T) PKM (T)	≤ 7,5 CV N/S/SIL ó 270 litros	50		15-21
3/4"	PKE PKM RTA RTB 15-20 (T/D)	Aluminio > 7,5 CV ó 500 litros	100	PLX 4-18 COOL 4-22	30
1"	RTB base DRB base		270 - 720	PLX 22-30 COOL 30-36	30-48
1-1/4"	DRB DRY				
1-1/2"	RTC DRC		900	PLX 36-77 COOL 41-77	84-156
2"	DRD - DRE 120		1000 - 2000	PLX 100-180	216
3"	DRE 150 - DRF		3000 - 5000	PLX 240-350	315-405
DN 125				PLX 450-840	